




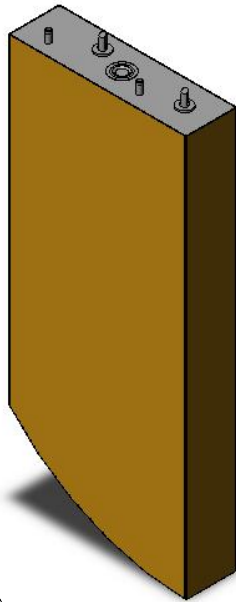

Model NCP350-1
3.6V, 350 Ah Lithium Ion Cell

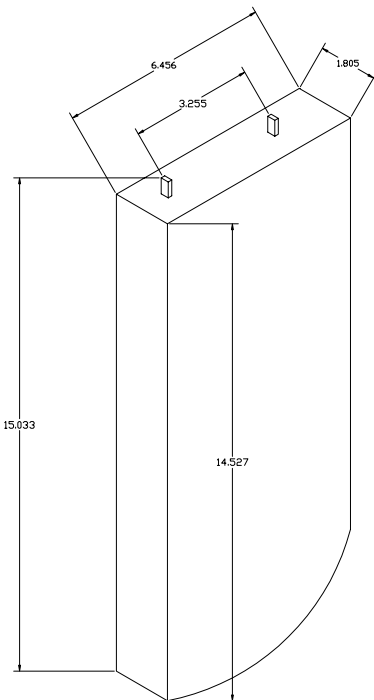

Typical Discharge Curve

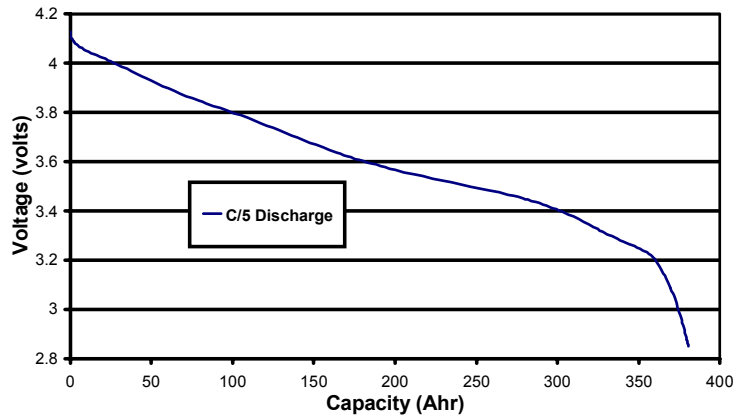

Physical Dimensions

(Dimensions in inches)

Performance Data

Cathode: Lithiated Nickel Cobalt	Nominal Voltage: 3.6 VDC
Anode: Graphite	Nominal Weight: 6.67 kg
Electrolyte: EC:DMC:DEC	Cycle Life: > 220 Cycles
Nominal Capacity: 370 Ah	Energy Density: 500 Wh/l
Pulse Current: Fuse Limited	Specific Energy: 212 Wh/kg
Continuous Current: 120 A (20 deg. C)	Coulombic Efficiency: 99%
Dimensions: (mm) 164W x 46T x 369H	Fade Rate: 0.03%/Cycle
Operating Temperature Range: -20C to +60C	

Lithion, Inc.
82 Mechanic St.
Pawcatuck, CT 06379
PH:(860) 599-1100 FAX:(860) 599-5122
www.lithion.com